

ME2P-1231-32U3M/C

MERCURY2 Plus Series 12.3MP CMOS USB3.0 Area Scan Camera



The ME2P-1231-32U3M/C camera is a monochrome/color USB3.0 Vision camera with the Sony IMX253 CMOS sensor. The ME2P-1231-32U3M/C camera has opto-isolated I/Os that adapt to specific needs. Four-side mounting holes provide maximum installation flexibility for ME2P-U3. Thanks to the extremely compact (36mm × 31mm × 38.8mm), robust metal housings and locking screw connectors, the MERCURY2 Plus cameras can secure the reliability of cameras deployed in harsh environments.


Applications

Suitable for machine vision applications such as industrial inspection, medical, scientific research, education and so on.

Features

- Trigger mode: Frame Start /Frame Burst Start
- Two exposure time modes: Standard exposure time mode / UltraShort exposure time mode
- Support Gamma, Binning, Decimation, Digital Shift, Black Level and Flat Field Correction
- Color models support Light source preset, Color Transformation Control and Saturation
- Monochrome models support Noise Reduction and Sharpness
- Support Sequencer Control, Sensor Bit Depth, Programmable LUTs and User Set Control
- Support Timer and Counter
- Support Remove Parameter Limit to expand the range of exposure, gain, and so on
- 16KB data storage area for saving algorithm coefficients and parameter configuration

Spectral Response

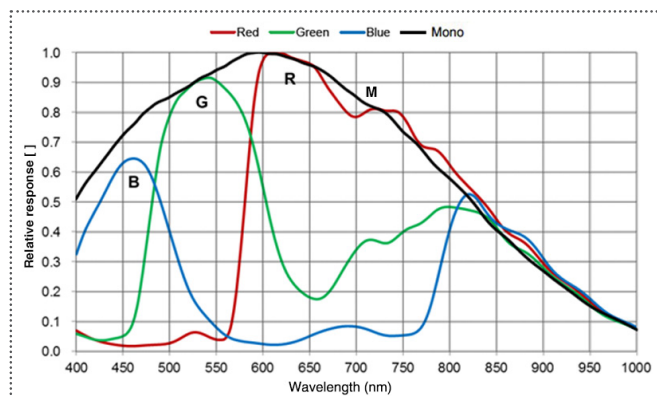

Specifications


| Model | ME2P-1231-32U3C | ME2P-1231-32U3M |
|--------------------|----------------------------------------------------------------------------------------------|-------------------------|
| Resolution | 4096(H) × 3000(V) | |
| Sensor | Sony IMX253 Global shutter CMOS | |
| Sensor Format | 1.1" | |
| Pixel Size | 3.45μm × 3.45μm | |
| Frame Rate | 32.1 fps | |
| ADC | 8 bit, 10 bit, 12 bit | |
| Pixel Bit Depth | 8 bit, 10 bit, 12 bit | |
| Mono/Color | Color | Mono |
| Pixel Formats | Bayer RG8 / Bayer RG10 / Bayer RG12 | Mono8 / Mono10 / Mono12 |
| SNR | 40.79 dB | 40.63 dB |
| Exposure Time | UltraShort: 1μs~100μs, Actual Steps: 1μs; Standard: 24μs ~ 1s, Actual Steps: 1 row period | |
| Gain | 0dB ~ 24dB; Default: 0dB, Steps: 0.1dB | |
| Binning | FPGA: 1×1, 1×2, 1×4, 2×1, 2×2, 2×4, 4×1, 4×2, 4×4 Sensor: 1×1, 1×2 (Only for mono model) | |
| Decimation | Sensor: 1×1, 2×2 | |
| Synchronization | Hardware trigger, software trigger | |
| Acquisition Mode | Single frame, Continuous, Software trigger, Hardware trigger | |
| Reverse X/Y | Reverse X/Y | |
| I/O Interface | 1 input and 1 output with opto-isolated, 2 programmable GPIOs | |
| Data Interface | USB3.0 | |
| Power Supply | Power over USB3.0 | |
| Typical Power | 3.05 W @ 5 VDC | |
| Operating Temp. | 0°C ~ +45°C | |
| Storage Temp. | -20°C ~ +70°C | |
| Operating Humidity | 10% ~ 80% | |
| Lens Mount | C / CS | |
| Dimensions | 36(W) × 31(H) × 38.8(L) mm (without lens adapter or connectors) | |
| Weight | 66 g | |
| Software | 3rd-party software such as HALCON, MERLIC and LabVIEW | |
| OS | 32bit / 64bit Windows, Linux, Android, ARMv7, ARMv8 | |
| Conformity | CE, RoHS, FCC, ICES, UKCA, USB3.0 Vision®, GenICam® | |

I/O Interface



| Pin | Definition | Description |
|-----|------------|------------------------|
| 1 | Line 0+ | Opto-isolated input + |
| 2 | GND | GPIO GND |
| 3 | Line 0- | Opto-isolated input - |
| 4 | NC | NC |
| 5 | Line 2 | GPIO input/output |
| 6 | Line 3 | GPIO input/output |
| 7 | Line 1- | Opto-isolated output - |
| 8 | Line 1+ | Opto-isolated output + |

Technical Drawing

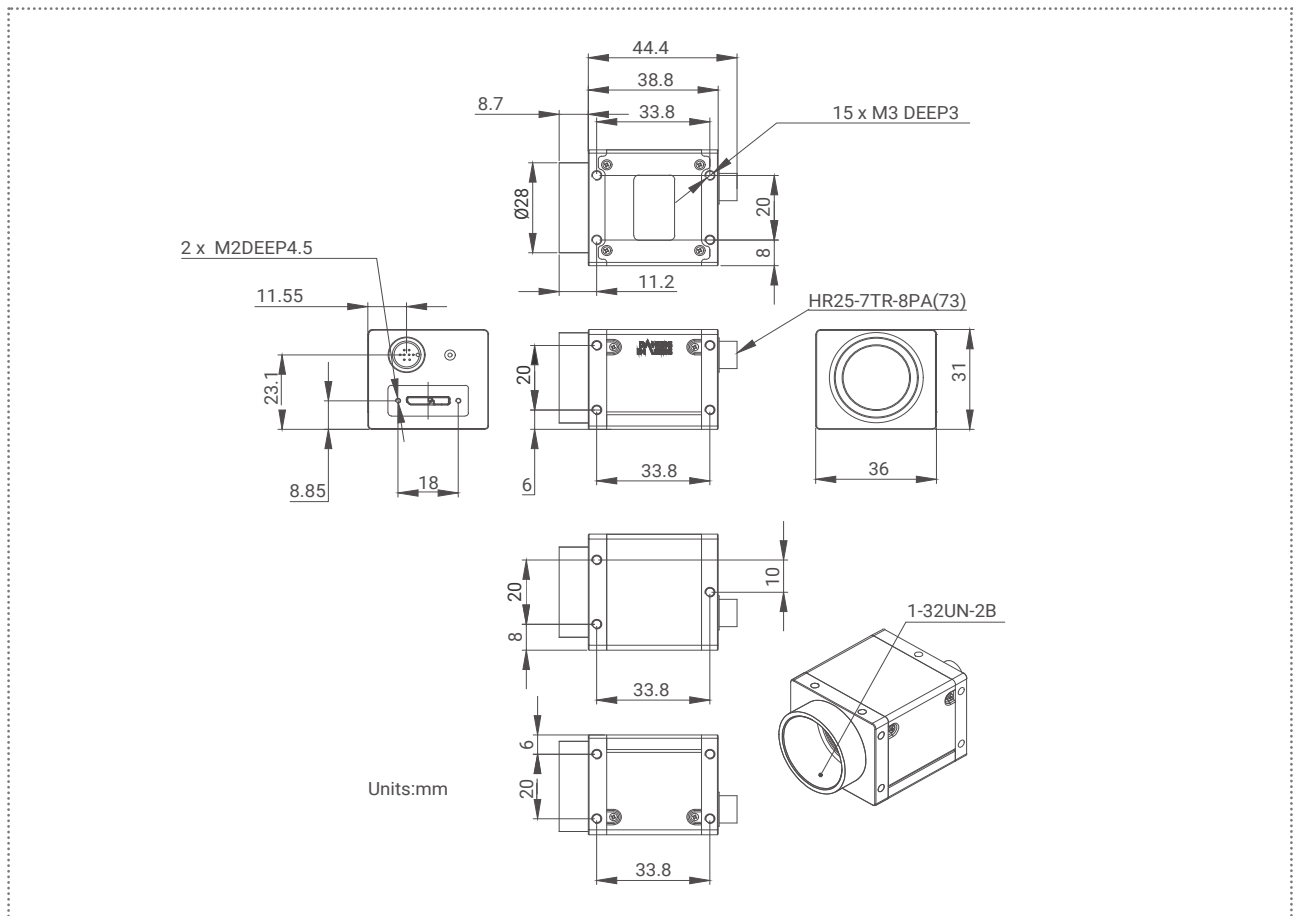

China Daheng Group, Inc. Beijing Image Vision Technology Branch

12F Daheng Science & Technology Tower, No.3 Suzhou Street, Haidian District, Beijing China, 100080

Tel: +86 10 82828878

E-mail: isales@daheng-imaging.com