

LineX Series CIs

Micro Working Distance Camera

Product model: INS-CHVS-1550-10GM



1.Product Outline

Model	INS-CHVS-1550-10GM-BB	INS-CHVS-1550-10GM-AA	INS-CHVS-1550-10GM-BA	INS-CHVS-1550-10GM-AA1	Note
Control board	CIS-MAIN*3	CIS-MAIN*3	CIS-MAIN*4	CIS-MAIN*4	
Digital data output interface	10GigE*3	10GigE*3	10GigE*4	10GigE*4	
Command transmission interface	Serial interface	Serial interface	Serial interface	Serial interface	
Scanning width	1539	1539	1539	1539	mm
Resolution	600	300	600	300	DPI
Effective pixel point	36401	18245	36401	18245	Pixels
Line frequency	66	110	95	150	kHz
Scanning speed	2.8	9.3	4	12.6	m/s
Data transfer rate	30	30	40	40	Gbps
Power supply	+24V×5A	+24V×5A	+24V×5A	+24V×5A	To control boards/fan
	+24V×8A	+24V×8A	+24V×8A	+24V×8A	To LED boards
External dimension	Figure 1	Figure 1	Figure 1	Figure 1	
Focus position(from glass surface)	15	15	15	15	mm
Image format	Mono8	Mono8	Mono8	Mono8	
Appearance colour	Black	Black	Black	Black	
Appearance colour	Black	Black	Black	Black	

2.Serial Interface

This serial interface uses hex code.

Item	Value
Baud rate	115200
Start bit	1
Data bit	8
Parity bit	None
Stop bit	1
Flow control	None

3.Maximum Rating

Item	Symbol	Specification	Note
DC supply voltage	Control boards	+24V±1V	
	LED boards	+24V±1V	
Ambient temperature	Ta	0~+40℃	Operating
		-20~60℃	Storage
Ambient humidity		10%~90%RH	

4.Connector Plug/Unplug

Unplug & plug the cable number should be less than 50. The connector will be ineffective if it is extracted and inserted over that number.

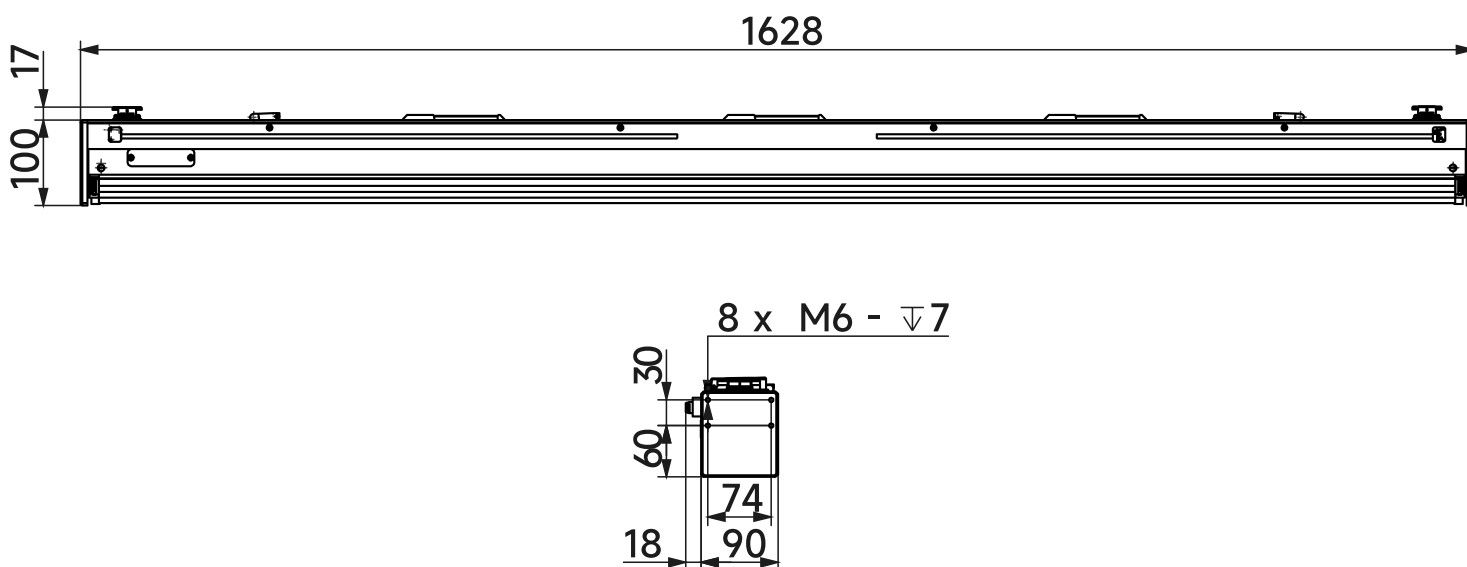
5. Stable Operation

(1) The connector pins should not be touched by bare hands or electrostatic charge materials.

(2)Latch-up
When the supply voltage exceeds the absolute maximum, Latch-up will occur. Latch-up will cause the sensor to be broken, even if the voltage is caused by a surge. If the current varies rapidly in the external circuit, or when the power is switched on and off very frequently, ensure that the voltage of each terminal does not exceed the values indicated in below.

(3) Absolute maximum rating

Item	Specification		Unit
	Min.	Max.	
Control boards supply voltage	-0.3	+25	V
LED boards supply voltage	-0.3	+25	
Shaft encoder input voltage	-0.3	5.5	
External trigger input voltage	-0.3	25	
External trigger output voltage	-0.3	25	

INS-CHVS-1550-10GM**CONTACT US**

Ins nex Technologies Co.,Ltd

Address: Building R, No. 218 Xingming Street, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone

Postal Code: 215000

Website: <http://www.insnex.com/>

Telephone: (86) 0512-67159489

E-mail: Services@Insnex.com