

ME2P-2621-4GM/C-P-HF8/VF8

26MP CMOS GigE Area Scan Camera



GIG
VISION

GEN<i>i</i>CAM



ME2P-2621-4GM/C-P-HF8/VF8 is a monochrome/color Tilt-Shift Camera with the Gpixel GMAX0505 CMOS sensor. When the object is not parallel to the sensor, the horizontal/vertical angle between lens and sensor plane can be adjusted from 0 to 8 degree to increase the depth of field. Four-side mounting holes provide maximum installation flexibility for ME2P-G-P, the MERCURY2 Plus PoE series cameras can secure the reliability of cameras deployed in harsh environments.

Applications

Suitable for machine vision applications such as industrial inspection, medical, scientific research, education and so on.

Features

- Gamma, Black Level, Digital Shift, Sharpness
- Flat Field Correction, Static Defect Correction
- Binning, Decimation
- Color models support Light Source Presett, Color Transformation Control, Saturation and White Balance
- Monochrome models support Noise Reduction
- Timer, Counter, LUTs and User Set Control

Specifications


Model	ME2P-2621-4GC-P-HF8/VF8 ME2P-2622-4GC-P-HF8/VF8	ME2P-2621-4GM-P-HF8/VF8 ME2P-2622-4GM-P-HF8/VF8
Resolution	5120(H) × 5120(V)	
Sensor	Gpixel GMAX0505 Global shutter CMOS	
Sensor Format	1.1"	
Pixel Size	2.5μm × 2.5μm	
Frame Rate	4.5 fps	
ADC	12 bit	
Pixel Bit Depth	8 bit, 12 bit	
Mono/Color	Color	Mono
Pixel Formats	Bayer GB8 / Bayer GB12	Mono8 / Mono12
SNR	35.65 dB	35.93 dB
Exposure Time	Standard: 14μs~1s, Actual Steps: 1μs	
Gain	0dB~16dB, Default: 0dB, Steps: 0.1dB	
Binning	1×1, 1×2, 1×4, 2×1, 2×2, 2×4, 4×1, 4×2, 4×4	
Decimation	Horizontal FPGA, Vertical Sensor: 1×1, 1×2, 1×4, 2×1, 2×2, 2×4, 4×1, 4×2, 4×4	
Synchronization	Hardware trigger, software trigger	
Acquisition Control	Single frame, Continuous, Software trigger, Hardware trigger	
Reverse X/Y	Reverse X/Y	
I/O Interface	1 input and 1 output with opto-isolated, 2 programmable GPIOs	
Data Interface	GigE PoE	
Power Supply	PoE (Power over Ethernet, IEEE802.3af compliant) or 12VDC-10% ~ 24VDC+10% supplied via the camera's 8-pin Hirose connector	
Typical Power	3.64 W @ 12 VDC, 4.36 W @ PoE	
Operating Temp.	0° C ~ +45° C	
Storage Temp.	-20° C ~ +70° C	
Operating Humidity	10% ~ 80%	
Lens Mount	C / CS	
Dimensions	63(W) × 63(H) × 65.13(L) mm (without lens adapter or connectors)	
Weight	152 g	
Software	3rd-party software such as HALCON, VisionPro and LabVIEW	
OS	32bit / 64bit Windows, Linux, Mac OS	
Conformity	CE, RoHS, FCC, ICES, UKCA, GigE Vision®, GenICam®	

I/O Interface




Pin	Definition	Description
1	Line 0+	Opto-isolated input +
2	GND	PWR GND & GPIO GND
3	Line 0-	Opto-isolated input -
4	POWER_IN	Camera external power, +12V DC~+24V DC
5	Line 2	GPIO input/output
6	Line 3	GPIO input/output
7	Line 1-	Opto-isolated output -
8	Line 1+	Opto-isolated output +


Spectral Response

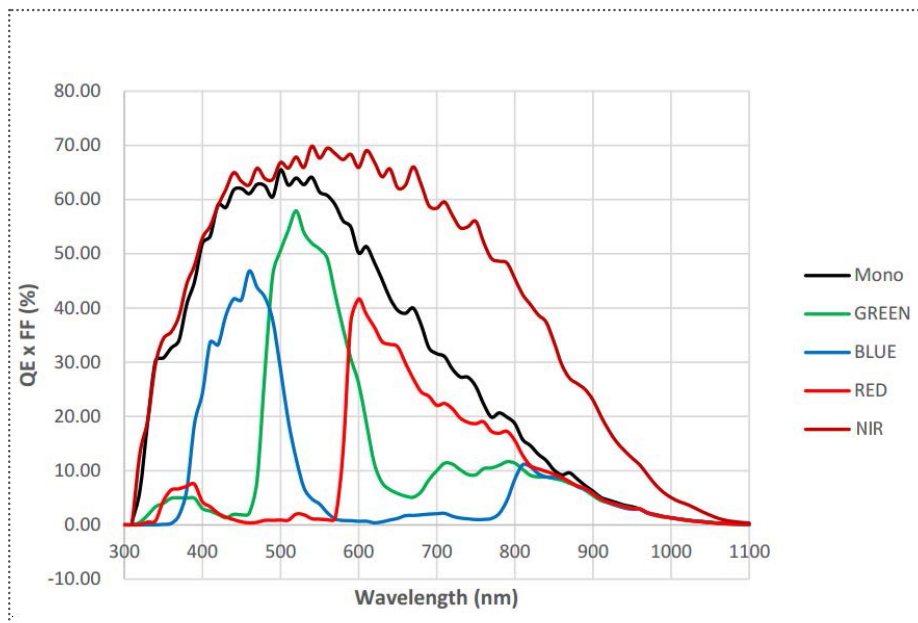

Technical Drawing

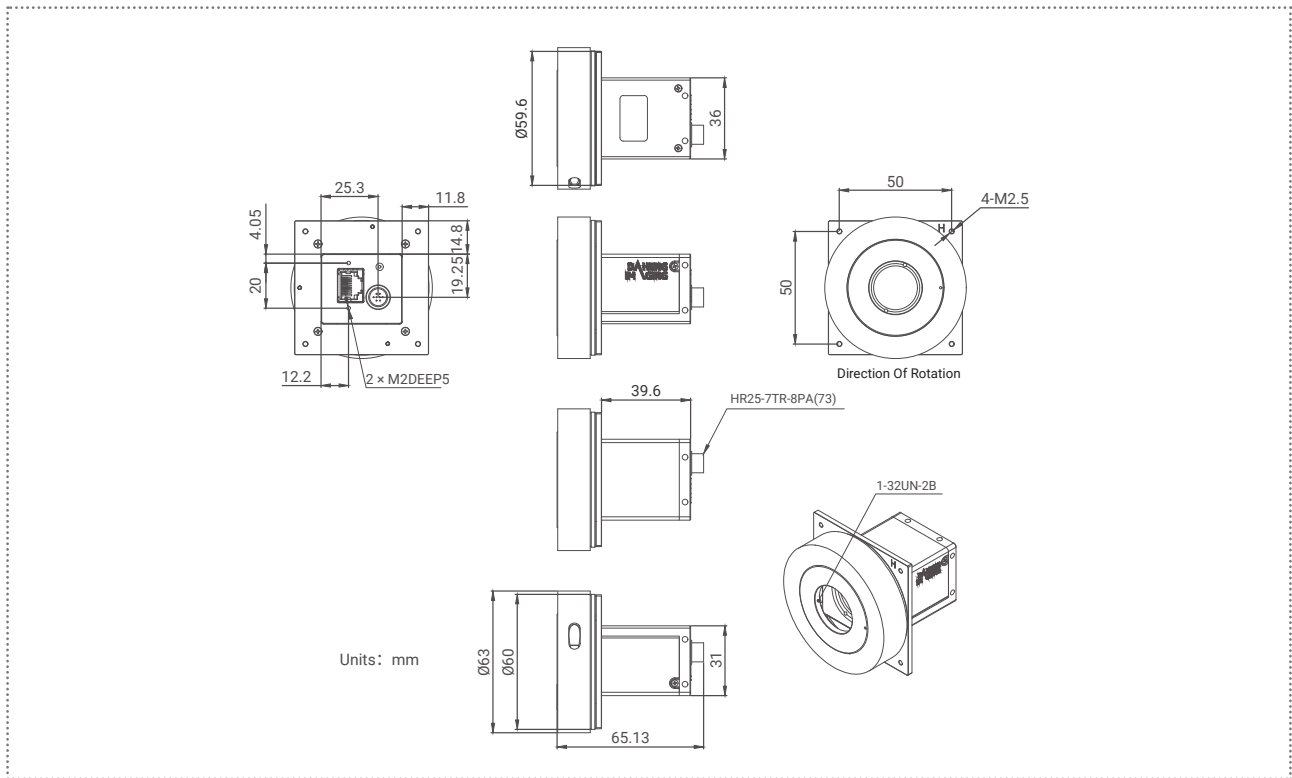

ME2P-2621-4GM/C-P-HF8

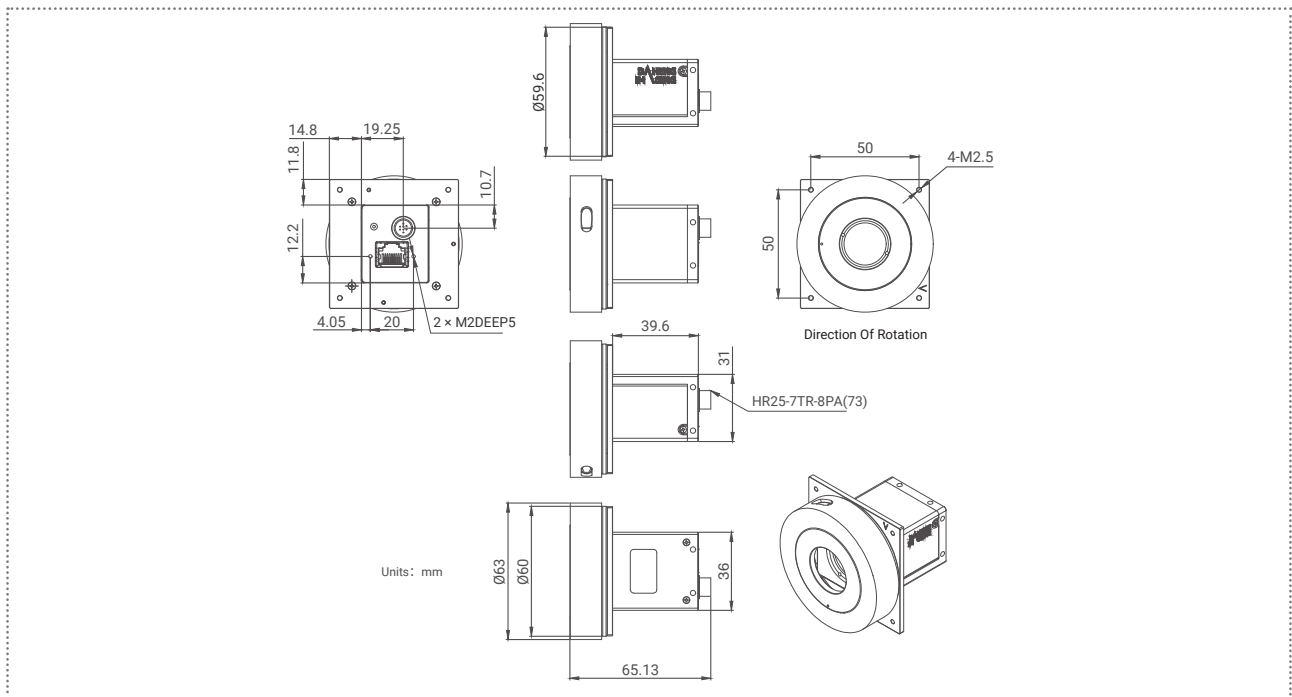

ME2P-2621-4GM/C-P-VF8

China Daheng Group, Inc. Beijing Image Vision Technology Branch

12F Daheng Science & Technology Tower, No.3 Suzhou Street, Haidian District, Beijing China, 100080

Tel: +86 10 82828878

E-mail: isales@daheng-imaging.com