

FORGE® 5GigE

Industrial Machine Vision Camera | FG-P5G-161S7M-C and FG-P5G-161S7C-C

KEY FEATURES

Building Reliable and Powerful Systems, Faster

Constructed on an all-new platform, the Forge camera is designed to offer the richest combination of on-camera pre-processing features, leverage the industry's most advanced sensors, and support the Trigger-to-Image Reliability (T2IR) framework for you to easily build robust systems.

Beyond 5GigE Performance

In addition to supporting link speeds of 1, 2.5, and 5GigE, the Forge offers burst mode to capture images into memory at speeds up to 10 Gb/s. This combined with a 500 MB image buffer allows engineers to control data transfer without overwhelming the host.

Ease of Integration


Forge is designed to simplify OEM integration with features including PoE, strong thermal management, and isolated triggering for streamlined peripherals and easier camera control. Forge supports both Teledyne Spinnaker and Spera SDKs and GigE Vision compliant software packages.

APPLICATIONS

- Electronics Inspection
- Food Processing
- Pharmaceuticals
- Sports Analytics
- Virtual Reality Motion Capture

High Speed, High Precision Image Acquisition

Forge is based on an all-new camera platform designed to support a feature and sensor set to easily built robust and powerful systems faster. It offers flexibility link speeds as well as the ability to go beyond 5GigE performance and control data transfer to the host. With OEMs in mind, Forge provides features for easy integration, a seamless upgrade path from 1GigE systems, and supports a choice of SDK's and GigE Vision compliant software packages.

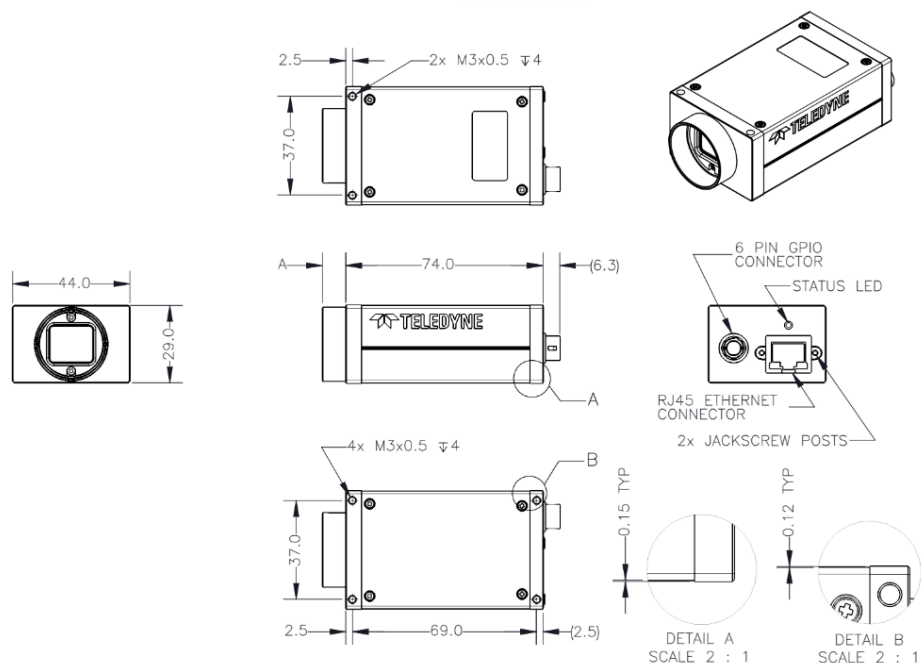

Product appearance and specifications are subject to change without notice

SPECIFICATIONS

	FG-P5G-161S7M-C	FG-P5G-161S7C-C
Resolution	5320 x 3032	
Frame Rate*	38 FPS Base / 52.5 Burst Mode	
Megapixels	16.1 MP	
Sensor	Sony IMX542, CMOS, 1.1"	
Readout Method	Global Shutter	
Pixel Size	2.74 μ m	
Spectrum	Mono	Color
Lens Mount	C-mount	
ADC	8-bit / 10-bit / 12-bit	
Minimum Frame Rate*	1 FPS	
Gain Range*	0 – 48 dB	
Exposure Range*	10 μ s to 30 seconds	
Acquisition Modes	Continuous, Single Frame, Multi Frame	
Partial Image Modes	Pixel binning, decimation, ROI	
Image Processing	Gamma, lookup table	
Image Buffer	500 MB	
User Sets	2 user configuration sets for custom camera settings	
Flash Memory	4 MB (for user-defined data)	
Opto-isolated I/O	1 input, 1 output	
Non-isolated I/O	1 bi-directional, 1 input	
Serial Port	1 over non-isolated I/O	
Auxiliary Output	3.3 V 120 mA	
Interface	Gigabit Ethernet 5 Gbps / 2.5 Gbps / 1 Gbps	
Power Requirements	Power over Ethernet (PoE); or 12 V nominal (9.5 - 24 V)	
Power Consumption	8.5 W maximum PoE / 6.6 W maximum GPIO	
Dimensions / Mass	29 mm x 44 mm x 74 mm / 132 g	
Machine Vision Standard	GigE Vision v2.0	
Compliance	CE, FCC, KCC, RoHS, REACH. The ECCN for this product is: EAR099	
Temperature	Operating: 0°C to 65° (measured at the front face of the camera) / Storage: -30°C to 60°C	
Humidity (no condensation)	Operating: 20% - 85% / Storage: 20% - 95%	
Warranty	3 years	

* Frame rates are in free running mode. Exposure and gain values are the same in binning and no binning modes.

FOR MORE INFORMATION CONTACT:

THE AMERICAS
 T: +1 866.765.0827 (toll free)
 T: +1 604.242.9937
 E: mv-sales@teledyne.com

EUROPE, MIDDLE EAST, AFRICA
 T: +49 7141 488817-0
 F: +49 7141 488817-99
 E: mv-eusales@teledyne.com

CHINA BEIJING OFFICE
 T: +86-10-84669678 ex. 8019

SHANGHAI OFFICE
 T: +86-21-32501002 ex. 801
 E: mv-chinasales@teledyne.com
 E: mv-taiwansales@teledyne.com

JAPAN AND ASIA PACIFIC
 T: +81-3-5422-7866
 E: mv-japansales@teledyne.com

This document does not contain information whose export/transfer/disclosure is restricted by the Canadian Export Control regulation. Teledyne FLIR reserves the right to make changes at any time without notice.
 © 2024-2025 Teledyne FLIR